



Specification of Resistive Controller Board & User Manual

Customer :

Model : 33-5W232-BB

Date :

Version:

Acceptance Sheet			
Onetouch Technologies Co., Ltd.			
(Supplier)		(Purchaser)	
Date	Approval Signature	Date	Approval Signature

SPECIFICATION REVISION RECORD

Customer :
Customer NO. :

Issue Date :
Model :

NO.	Version	Issue Date	Summary of Changes	Page

< Remarks >

Note !!

Please avoid using it on the products correlated with the human life. (For example: Medical apparatus, universe apparatus, plane, seafloor relay apparatus, etc. needs high trusting thing)


If consider applying to the control of transporting apparatus (train, automobile, boat) or as correlated security, please tell to seller in advance. The quality of this product is used in general products mainly (Computer, OA machine, FA machine, communication apparatus, measurement apparatus, AV machine, etc.)

- * The copyright of this specifications is in Onetouch Technologies Co., Ltd..
All reprint and the reproduction of without permission are prohibited.
- * The content of this specifications might change without a previous notice.

ONETOUCH launched touch control board to meet latest Restriction of Hazardous Substances (RoHS) Directive. This touch panel controller provides the optimistic performance of your analog resistive touch panels for 5-wire models. It communicates with PC system directly through RS232 connector. You can see how superior the design is in sensitivity 、 accuracy and friendly operation. The touch panel driver emulates mouse left and right button function and supports operation systems as following.

OS	Version	Interfaces
Windows	Windows 8, 7, Vista, XP, 2000, ME, 98 Windows CE (up to 7.0) Windows Embedded Windows XP Tablet PC edition	RS232/USB
Windows	Windows NT4, 95	RS232
Linux	Supports Kernel 2.4.x / 2.6.x / 3.x with XFree86 4.x / xorg (up to X server 1.11.x). Supports most of the Linux distribution 32/64 bit versions, Including: CentOS, Debian, Fedora, Gentoo, Mandrake(Mandriva), Moblin(Meego), Red Hat, Ubuntu, Slackware, SuSE(openSuSE) etc.	RS232/USB
	Android (up to 4.x)	RS232/USB
DOS	DOS 6.22	RS232
Mac	Mac OS9, Mac OS X (Power PC, Intel CPU)	USB
QNX	QNX RTOS v6.3	RS232/USB

Controller:

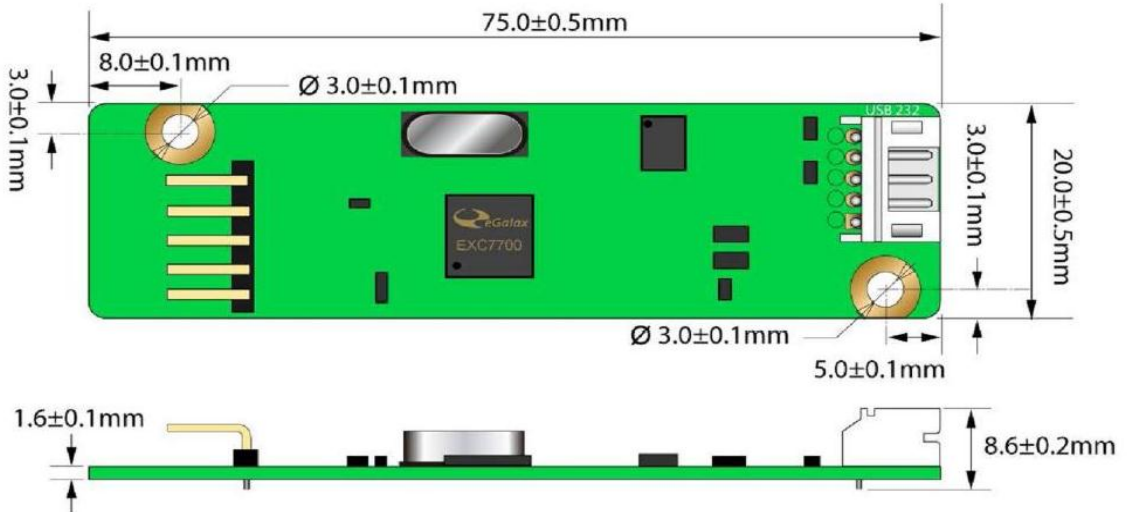

Specifications:

5 Wire RS232 Type Controller

Circuit Board Dimension	20mm x 75mm (0.79inches x 2.95inches)
Power Requirements	D.C.+5V (100mA typical,50mV peak to peak maximum ripple and noise)
Operating Temperature	-25 to 85 °C
Storage Temperature	-25 to 85 °C
Relative Humidity	95% at 60 °C , RH Non-condensing
Interface	Bi-directional RS-232 serial communication
Protocol	No parity,8 data bits,1 stop bit,9600 baud(N,8,1,9600)
Resolution	2048×2048 resolution
Report rate	RS232: Max. 180 point/sec
Response time	Max. 20 ms
Attached Cable	RS232: 180cm shielded cable with 9-pin D-sub connector
Regulatory Approvals	FCC-B , CE
EMI	Unaffected by environmental EMI
Panel resistance	5 wire resistive model: 50 ~ 200 ohm (Pin to pin on same layer, Touch Resistance under 3k ohm)
Green Product	RoHS Compliant
MTBF	200,000 hrs



Product Package:

- (1) ETP-MB-MER4050REBG (V.1.1012.4)
- (2) ETP-CB-SXR00 (RS232 cable)
- (4) ETP-CB-5XN00 (5 pin Flat cable)

Controller Panel Pin Assignment:

For 5-Wire Resistive Touch Panel

ELO type Pin-Out

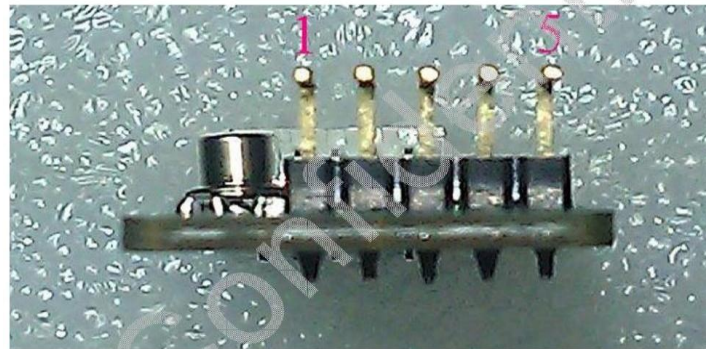

Controller Wafer Pin Assignment:

